

FLEX LINE

TS 46 / TS 46N / TS 46T



HIGH STANDARD PERFORMANCES & VERSATILITY

The FLEX LINE range fits all types of sterilization units (CSSD) while ensuring optimal sealing quality.

! THE FLEX LINE KEY STRENGTHS:

- A compact, solid and versatile range
- Several traceability options available (USB / PRINTER)
- A wide colour touch screen (TS 46T)
- Made in France




LEF : ENJOY QUALITY!






TS 46 sealer

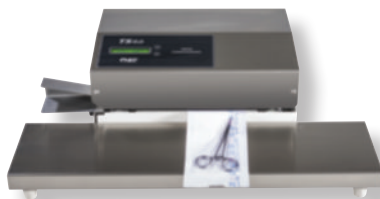

TS 46N sealer with stainless steel tray

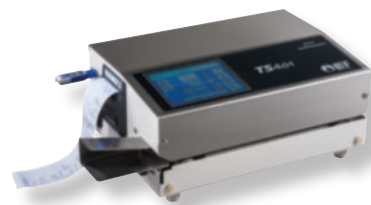

TS 46T sealer with USB & PRINTER option

	TS 46 / 46N	TS 46T
TECHNICAL CHARACTERISTICS		
Type : Rotary heat sealer	●	●
Standards : CE / CEM / Low voltage / HS Code 8422300000	●	●
Standards : EN 868-5, DIN 58953-7	●	●
Standards : EN ISO 11607-2	- / ●	●
Temperature calibration certificate (COFRAC)	- / ●	●
Microprocessor control	●	●
USB output	-	●
Display	1 line LCD	5.5" colour touch screen
Multifunction intuitive menu (graphics, counters, informative messages , multilingual, alphanumeric keyboard...)	-	●
Integrated digital maintenance notebook	-	●
Sealings counter with reset	-	●
Temperature range	20-230°C	20-230°C
Pre-programmed temperatures	-	5
Temperature regulation tolerance	2%	1%
Automatic start & stop by photocell	●	●
Safety : automatic start-up at set point	●	●
Safety : overheating automatic stop (250°C)	●	●
Safety : critical parameters control complying with ISO 11607-2 (temperature & pressure)	- / ●	●
Safety : automatic stop if critical parameters exceed limits	- / ●	●
Adjustable pouches guide (0-30 mm from edge)	●	●
Sealing width	15 mm	15 mm
Sealing length	unlimited	unlimited
Sealable pouches (SBS) : steam / OE / alu / Tyvek® / ULTRA® ...	●	●
Main connection / frequency	230V - 50/60 Hz	230V - 50/60 Hz
Power	400 W max.	400 W max.
Hood / cover	stainless steel	stainless steel
Dimensions L x l x H (mm)	350 x 260 x 140	350 x 260 x 140
Weight (Kg)	8	8

ACCESSORIES & OPTIONS		
Stainless steel front support tray (580 x 160 x 60 mm)	optional	optional
Roll conveyor (800 x 300 x 60 mm)	optional	optional
Critical parameters intelligent self-test with monitoring report (OQ), complies with ISO 11607-2 (PRINTER)	-	optional
Tracking and storage of all the sealing process parameters (ISO 11607-2) via USB stick	-	optional



labo-electrofrance.com

LEF / Labo Electrofrance – 31, rue Saint-Lazare – 75009 Paris France

+33 1 30 37 63 60 – +33 1 30 37 66 69

export@lefsealers.com – www.lefsealers.com

