


PRINT LINE

TS 47 / TS 47N / TS 47T

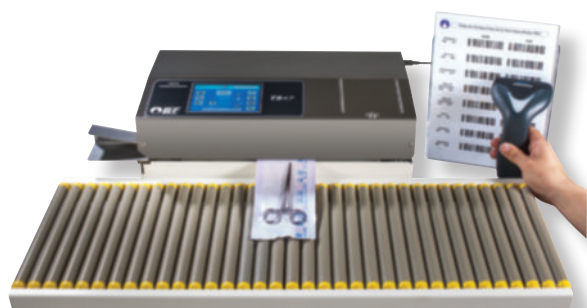

PRINTING & TRACEABILITY

The PRINT LINE range offers CSSD units the best of technology by printing requested information on pouches with a perfect sealing efficiency.

- !** THE PRINT LINE KEY STRENGTHS :
- Amazingly easy handling
 - Scanner control
 - Barcode editing software included
 - Made in France



LEF : ENJOY QUALITY!





TS 47 sealer with SCANNER option



TS 47T sealer with SCANNER and stainless steel support tray



TS 47T sealer with SCANNER and USB & PRINTER options

	TS 47 / 47N	TS 47T
--	-------------	--------

TECHNICAL CHARACTERISTICS

Type : Rotary heat sealer with printer - Printout (texts & symbols) : date, expiry date, users, batches, sealing counter, temperature, pressure, free text...	●	●
Standards : CE / CEM / Low voltage / HS Code 8422300000	●	●
Standards : EN 868-5, DIN 58953-7	●	●
Standards : EN ISO 11607-2	- / ●	●
Temperature calibration certificate (COFRAC)	- / ●	●
Microprocessor control	●	●
USB output	-	●
Barcode software & scanner for sealer programming (SCAN)	optional	●
Display	1 line LCD	5.5" colour touch screen
Multifunction intuitive menu (graphics, counters, informative messages , multilingual, alphanumeric keyboard...)	-	●
Integrated digital maintenance notebook	-	●
Sealings counter with reset	-	●
Temperature range	20-230°C	20-230°C
Pre-programmed temperatures	-	5
Temperature regulation tolerance	2%	1%
Automatic start & stop by photocell	●	●
Safety : automatic start-up at set point	●	●
Safety : overheating automatic stop (250°C)	●	●
Safety : critical parameters control complying with ISO 11607-2 (temperature & pressure)	- / ●	●
Safety : automatic stop if critical parameters exceed limits	- / ●	●
Adjustable pouches guide (0-30 mm from edge)	●	●
Sealing width	15 mm	15 mm
Sealing length	unlimited	unlimited
Sealable pouches : steam / OE / alu / Tyvek® / ULTRA® ...	●	●
Main connection / frequency	230V - 50/60 Hz	230V - 50/60 Hz
Power	400 W max.	400 W max.
Hood / cover	stainless steel	stainless steel
Dimensions L x l x H (mm)	460 x 260 x 160	460 x 260 x 160
Weight (Kg)	15	15

ACCESSORIES & OPTIONS

Barcode software & scanner for sealer programming (SCAN)	optional	optional
Stainless steel front support tray (700 x 300 x 55 mm)	optional	optional
Roll conveyor (800 x 300 x 60 mm)	optional	optional
Intelligent self-test of critical parameters with monitoring report (OQ), complies with ISO 11607-2 (PRINTER)	-	optional
Tracking and storage of all the sealing process parameters (ISO 11607-2) via USB stick	-	optional



labo-electrofrance.com

LEF / Labo Electrofrance – 31, rue Saint-Lazare – 75009 Paris France

☎ +33 1 30 37 63 60 – 📠 +33 1 30 37 66 69

✉ export@lefsealers.com – 🌐 www.lefsealers.com

